

An aerial photograph showing a green and white combine harvester in the middle of a golden-brown grain field. The harvester is positioned to the left, with its long auger extending towards a green and yellow trailer. A tractor is pulling the trailer from the bottom of the frame. The field is marked with distinct rows of harvested grain, and a cloud of dust or chaff is visible behind the harvester.

**Field transfer trailers for  
professionals**

**Higher performance in  
grain harvesting  
and sowing with field transfer  
trailers from HAWE-Wester**

**HAWE-Wester**  
GmbH & Co. KG  
**Maschinenbau**

# 25 percent more performance



Field transfer trailers from HAWE are available with a wide range of standard equipment and multiple selection of extra equipment. For example the ULW 3000 T with body-swap system, with special

tyres, lift axle and paint job in tractor colour (Fendt). Customers can choose the most suitable high performance trailer for all operational conditions. High quality of bought-in components and

assembly guarantee operational reliability, performance, operating ease and long working life.



Field transfer trailers with one axle....




.... with tandem axles or (special paintwork) ...



... with triple axles (standard equipment)

# HAWE field tra

# Up to three grain tank fillings

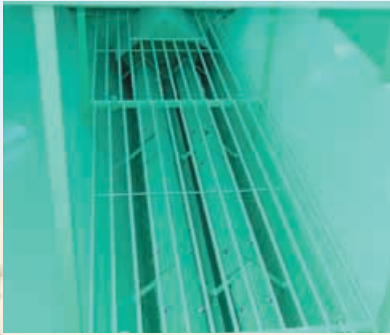

Large capacity hopper with floor augers



Large diameter unloading auger with central bearings and powerful drive



Sight control for the most important functions



Rolling-up and unrolling of trailer cover from ground level (standard as from ULW 1500 E)



Load-weighing rods for load-weighing system (optional)



Weighing computer display for tractor cab



Hydraulic positioning of seed chute for filling seed drills of up to 6 m working width



Hydraulic positioning of seed auger for seed drill combinations of over 6 m working width

**HAWE field transfer trailers** are key implements in professional grain harvesting. They enable on-the-go grain transfer from combines thus increasing combine-harvesting capacity by as much as 25 percent. The running gear design and tyres help prevent deep tracking and soil compaction

# Transfer trailers



## Specifications (standard equipment):

Type	ULW 1200 E	ULW 1500 E	ULW 2000 T	ULW 2500 T	ULW 3000 T
<b>Capacity (m<sup>3</sup>)</b>					
Standard	12	16	23	26	32
Optional	-	18	-	28	36
<b>Licensed gross weight (t)</b>	10	12	20	22	29/33 <sup>2</sup>
<b>Running gear</b>	Single axle with suspension	Single axle <sup>1</sup>	Tandem <sup>1</sup>	Tandem <sup>1</sup>	Triple <sup>1</sup>
<b>Hopper measurements</b>					
Length (m)	4.00	4.50	6.00	6.00	7.25
Breadth (m)	2.50	2.50	2.50	2.50	2.50
<b>Overall trailer measurements</b>					
Length (m)	6.55	7.05	8.55	8.55	9.80
Breadth incl. tyres (m)	2.80	2.95	2.85	2.95	2.95
Height: side/ centre					
Standard (m)	2.98	3.05/3.25	3.05/3.25	3.30/3.55	3.30/3.55
Options (m)	-	3.25/3.50	-	3.50/3.75	3.50/3.75
<b>Auger unloading height (m)</b>	4.20	4.60	4.60	4.60	4.60
<b>Auger diameter (cm)</b>	36.5	42	42	42	50
<b>Auger unloading rate (t/hour)</b>	150 – 200	200 – 400	200 – 400	200 – 400	450
<b>Tyres</b>	23. 1-26	30. 5-LR32	700/50x26.5 12 PR Traction	800/45x26.5 12 PR Traction	800/45x26.5 12 PR Traction
<b>Licensed top speed</b>	25 kph	25 kph	25 kph	25 kph	40 kph ALB <sup>3</sup>
Options	-	40 kph ALB <sup>3</sup>	40 kph ALB <sup>3</sup>	40 kph ALB <sup>3</sup>	-
<b>Load cover</b>	Option	Standard	Standard	Standard	Standard
Roller operated from ground level					

1) Parabola-suspension, 2) Optional (33 t), 3) ALB = automatic brake management

**Standard equipment:** steering axle with tandem and triple axle running gear, drive shaft with overload safety system; twin-circuit air brakes

**Optional extras:** electronic load weighing, lift axle, seed chute, seed auger, tandem and triple axle models deliverable with body-swap system and appropriate hydraulic and pneumatic suspension systems available. Available on request: various hitching systems for upper and lower attachment.

The HAWE product range is continually being further developed. We reserve the right to change specifications, prices and models at any time. Illustrations and specifications approximately binding.

**HAWE-Wester**  
GmbH & Co. KG  
**Maschinenbau**

Zum Turm 16  
D-26892 Wipplingen  
Tel. +49 (0) 49 66 / 9 18 80  
Fax +49 (0) 49 66 / 12 11  
www.hawe-wester.de